

**50 bar**

operating pressure

71 to 2760 Nm³/h

volume flow rate

1/2" to 3"

connections

1,5 to 65°C

operating temperature range

RAL 9005

standard colour

RAL 7040

optional colour

DESCRIPTION

CKL-HF condensate separators are designed for high efficient removal of bulk liquids from compressed air systems. Inside the housing there is a condensate separator element.

This element separates already liquefied water from mainstream and prevents the liquids and large particles from being airborne again.

To discharge condensate from the CKL-HF condensate separator it is essential to install automatic or electronic condensate drain.

APPLICATIONS

- Automotive
- Electronics
- Food & beverage
- Chemical
- Petrochemical
- Plastics
- PET
- General industrial application

CKL-HF SERIES

ALUMINIUM CONDENSATE SEPARATORS

**TD 50M**

page1044

EMD HP

page102


AOK 50B

page109



TECHNICAL DATA

Model	Pipe size	Max.oper. pressure	Flow rate at 7 bar(g), 20 °C		Temperature oper. range		Dimensions [mm]				Mass
	inch	bar/psi	Nm ³ /h	SCFM	°C	°F	A	B	C	D	kg
CKL-HF 007	1/2"	50/725	71	42	1,5 - 65	35 - 149	250	110	30	80	2,1
CKL-HF 010	3/4"	50/725	112	66	1,5 - 65	35 - 149	250	110	30	90	2,1
CKL-HF 018	1"	50/725	204	120	1,5 - 65	35 - 149	250	110	30	140	2,1
CKL-HF 047	1 1/2"	50/725	282	166	1,5 - 65	35 - 149	535	160	45	260	9,5
CKL-HF 070	1 1/2"	50/725	400	235	1,5 - 65	35 - 149	535	160	45	360	9,5
CKL-HF 094	2"	50/725	494	291	1,5 - 65	35 - 149	715	160	45	540	12,2
CKL-HF 150	2"	50/725	799	470	1,5 - 65	35 - 149	715	160	45	550	12,2
CKL-HF 200	3"	50/725	2160	1270	1,5 - 65	35 - 149	862	198	70	620	30,4
CKL-HF 240	3"	50/725	2760	1620	1,5 - 65	35 - 149	1010	198	70	780	34,9

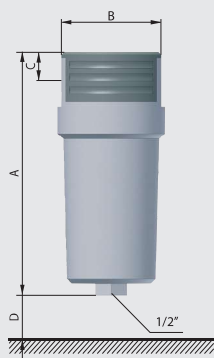

quality class - solids (ISO 8573-1)

-

quality class - water (ISO 8573-1)

8

quality class - oils (ISO 8573-1)

-

efficiency

>98%

CORRECTION FACTORS

Operating pressure [bar]	3	5	7	10	13	16	20	30	40	50
Operating pressure [psi]	44	72	100	145	189	232	290	435	580	725
Correction factor	0,50	0,75	1	1,38	1,75	2,13	2,63	3,88	5,13	6,38