

**16 bar**

operating pressure

840 to 14280 Nm³/h

volume flow rate

DN65 to DN300

connections

1,5 to 65°C

operating temperature range

RAL 9005

standard colour CS series

CS: carbon steel**CS SS: stainless steel 1.4404 material**

DESCRIPTION

CS condensate separators are designed for high efficient removal of bulk liquids and large impurities from compressed air systems. The insert inside the housing creates controlled rotation of the air flow. Centrifugal flow of liquids (water, oil) and large particles is forced to the housing wall, slowed down and accumulated at the bottom of separator housing as condensate.

The turbulent free zone in the lower part of the cyclone housing prevents condensate from being picked up and "carried over" into the airstream.

To discharge condensate from the CS cyclone separator it is essential to install automatic or electronic condensate drain. CS cyclone separators are also available in stainless steel version CS-SS.

APPLICATIONS

- Automotive
- Electronics
- Food and beverage
- Chemical
- Petrochemical
- Plastics
- Paint
- General industrial applications

CS/CS SS SERIES

WELDED CONDENSATE SEPARATORS

**TD16MCr**

page104

AOK 20SS

page108

AOK 20B

page107

TD16M


page104

ECD-B

page98


EMD12

page96

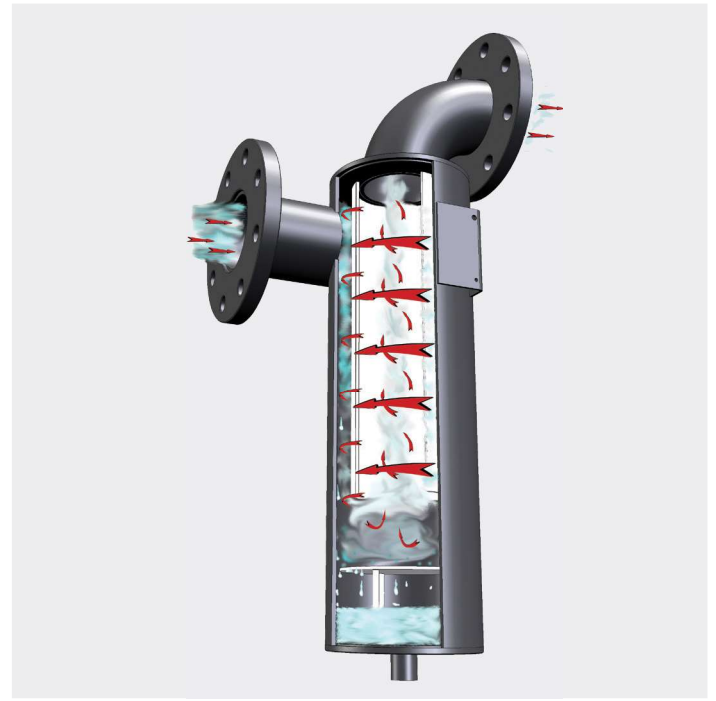

TECHNICAL DATA

Model		Pipe size	Max.oper. pressure	Flow rate at 7 bar(g), 20 °C		Temperature oper. range		Dimensions [mm]					Mass
carbon steel	stainless steel	DN	bar/psi	Nm³/h	SCFM	°C	°F	A	B	C	D	E	kg
CS 14	CS SS 14	65	16/232	840	495	1,5 - 65	35 - 149	613	153	302	45	1/2"	21
CS 28	CS SS 28	80	16/232	1710	1005	1,5 - 65	35 - 149	745	182	302	35	1/2"	26
CS 62	CS SS 62	125	16/232	3720	2190	1,5 - 65	35 - 149	1041	280	390	37	1/2"	56
CS 88	CS SS 88	150	16/232	5280	3110	1,5 - 65	35 - 149	1298	330	489	50	1/2"	94
CS 124	CS SS 124	200	16/232	7440	4380	1,5 - 65	35 - 149	1506	436	619	52	1/2"	147
CS 238	CS SS 238	300	16/232	14280	8404	1,5 - 65	35 - 149	1673	504	805	91	1/2"	290

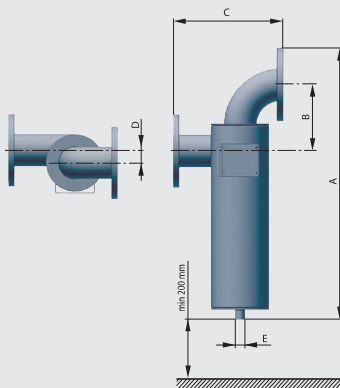

quality class - solids (ISO 8573-1)

-

quality class - water (ISO 8573-1)

8

quality class - oils (ISO 8573-1)

-

efficiency

>98%

CORRECTION FACTORS

Operating pressure [bar]	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Operating pressure [psi]	29	44	58	72	87	100	115	130	145	160	174	189	203	218	232
Correction factor	0,38	0,50	0,63	0,75	0,88	1	1,13	1,25	1,38	1,50	1,63	1,75	1,88	2,00	2,13