

Mounting Accessories for Stainless Steel Cylinders

Clevis ISO 8140



Standard executions		
Version	Symbol	Type
Female clevis		FFXISO



ON REQUEST, AVAILABLE IN STAINLESS STEEL AISI 316


Options	Sigla
Special versions on request	/ S

Clevis conforming to ISO 8140 standards.

They are complete with clips in the standard version (the models M27X2 and M36X2 are normally provided with a pin and 2 see-gers).

The clevis is mounted on the cylinder rod and allows a swinging movement.

Technical data	
Materials	Body and clip: Stainless steel AISI 303 Seeger: Stainless steel AISI 420

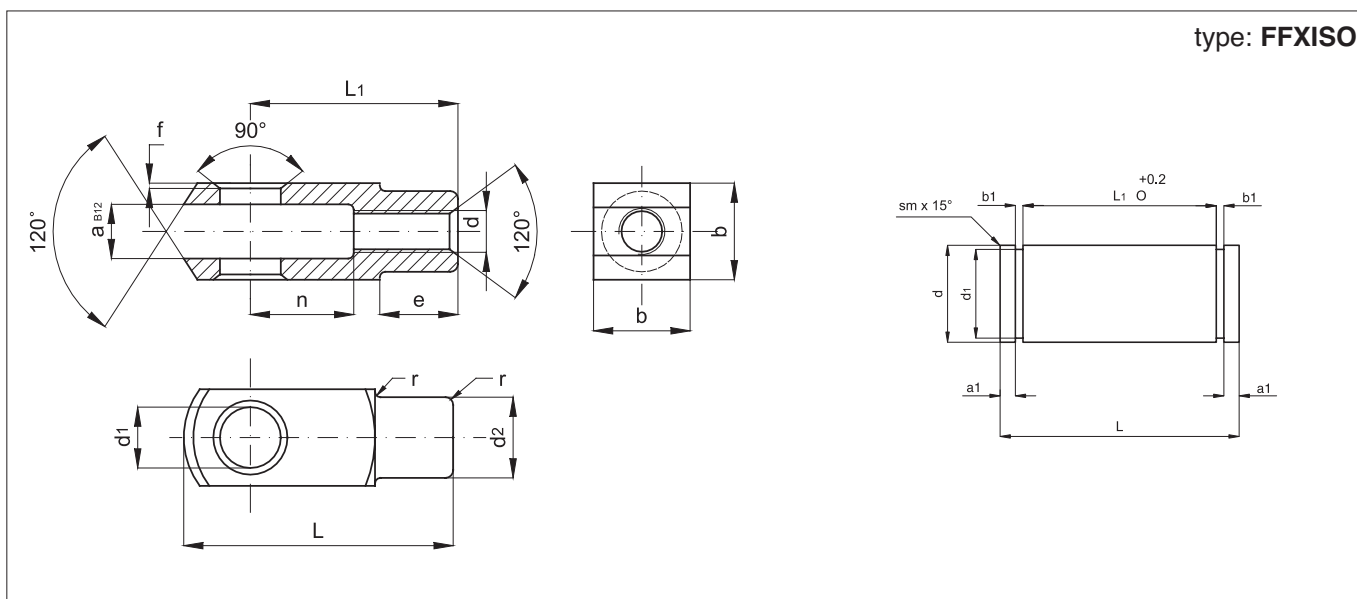

For the accessories of bore 125-160-200 mm, apply for availability because they have to be produced on request only.

Code	Item	For cylinder ø mm	d	a	a ₁	b ₁	b	d ₁	d ₃	L ₂	d ₂	e	f	L	L ₁	n	r	Weight (g)
041052	4FFXISO	8-10	M4x0,7	4	1	1,1	8	4	-	11	8	6	0,5	21	16	8	0,5	7
041053	6FFXISO	12-16	M6x1	6	1	1,1	12	6	-	16	10	9	0,5	31	24	12	0,5	19
041054	8FFXISO	20	M8x1,25	8	1	1,1	16	8	-	22	14	12	0,5	42	32	16	0,5	47
041055	10FFXISO	25-32	M10x1,25	10	1,5	1,1	20	10	9,6	25	18	15	0,5	52	40	20	0,5	89
041056	12FFXISO	40	M12x1,25	12	2	1,1	24	12	11,5	30	20	18	0,5	62	48	24	0,5	153
041057	16FFXISO	50-63	M16x1,5	16	2,4	1,1	32	16	15,2	39	26	24	1	83	64	32	1	320
041058	20FFXISO	80-100	M20x1,5	20	2,9	1,3	40	20	19	48	34	30	1	105	80	40	1	680
041112	27FFXISO	125	M27x2	30	-	-	55	30	-	-	48	38	1	148	110	54	1	-
041113	36FFXISO	160-220	M36x2	35	-	-	70	35	-	-	60	40	1	188	144	72	1	-