


Hydraulická šroubení

přímá šroubení

Přímá šroubení							
	Obj.č.	Řada	Tlak PN (bar)	Trubka D	Délka L1	⊕SW S1	⊕SW S
•	E-4LL	LL	100	4 mm	31	10	9
•	E-6LL	LL	100	6 mm	32	12	11
•	E-8LL	LL	100	8 mm	35	14	12
•	E-6L	L	500	6 mm	39	14	12
•	E-8L	L	500	8 mm	40	17	14
•	E-10L	L	500	10 mm	42	19	17
•	E-12L	L	400	12 mm	43	22	19
•	E-15L	L	400	15 mm	46	27	24
•	E-18L	L	400	18 mm	48	32	27
•	E-22L	L	250	22 mm	52	36	32
•	E-28L	L	250	28 mm	54	41	41
•	E-35L	L	250	35 mm	63	50	46
•	E-42L	L	250	42 mm	66	60	55
•	E-6S	S	800	6 mm	45	17	14
•	E-8S	S	800	8 mm	47	19	17
•	E-10S	S	800	10 mm	49	22	19
•	E-12S	S	630	12 mm	51	24	22
•	E-14S	S	630	14 mm	57	27	24
•	E-16S	S	630	16 mm	57	30	27
•	E-20S	S	400	20 mm	66	36	32
•	E-25S	S	400	25 mm	74	46	41
•	E-30S	S	400	30 mm	80	50	46
•	E-38S	S	400	38 mm	90	60	55

Upozornění: pro objednání těla šroubení bez matice a řezného kroužku uveďte na začátek obj.č. písmeno X např. XE-6L

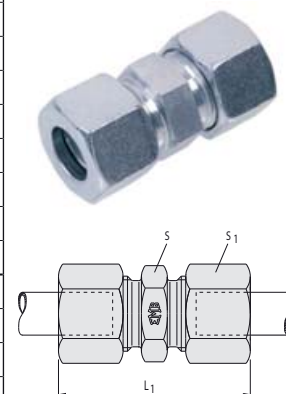

Redukovaná přímá šroubení – lehká řada									
	Obj.č.	Řada	Tlak PN (bar)	Trubka D1	Trubka D2	Délka L1	⊕SW S1	⊕SW S2	⊕SW S
•	ER-46LL	LL	100	6 mm	4 mm	32	10	12	11
•	ER-48LL	LL	100	8 mm	4 mm	34	10	14	12
•	ER-68LL	LL	100	8 mm	6 mm	34	12	14	12
•	ER-68L	L	500	8 mm	6 mm	40	14	17	14
•	ER-610L	L	500	10 mm	6 mm	41	14	19	17
•	ER-810L	L	500	10 mm	8 mm	41	17	19	17
•	ER-612L	L	400	12 mm	6 mm	42	14	22	19
•	ER-812L	L	400	12 mm	8 mm	42	17	22	19
•	ER-1012L	L	400	12 mm	10 mm	43	19	22	19
•	ER-1015L	L	400	15 mm	10 mm	45	19	27	24
•	ER-1215L	L	400	15 mm	12 mm	45	22	27	24
•	ER-1018L	L	400	18 mm	10 mm	46	19	32	27
•	ER-1218L	L	400	18 mm	12 mm	46	22	32	27
•	ER-1518L	L	400	18 mm	15 mm	48	27	32	27
•	ER-1222L	L	250	22 mm	12 mm	48	22	36	32
•	ER-1522L	L	250	22 mm	15 mm	50	27	36	32
•	ER-1822L	L	250	22 mm	18 mm	50	32	36	32
•	ER-1828L	L	250	28 mm	18 mm	52	32	41	41
•	ER-2228L	L	250	28 mm	22 mm	54	36	41	41
•	ER-2235L	L	250	35 mm	22 mm	59	36	50	46
•	ER-2835L	L	250	35 mm	28 mm	59	41	50	46

Upozornění: pro objednání těla šroubení bez matice a řezného kroužku uveďte na začátek obj.č. písmeno X např. XER-68L

